
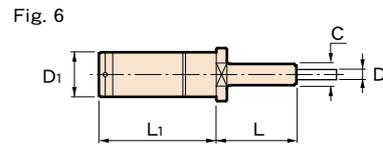
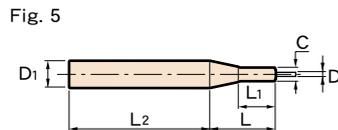
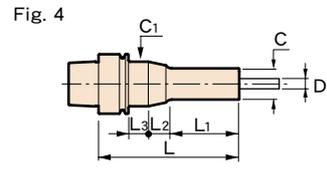
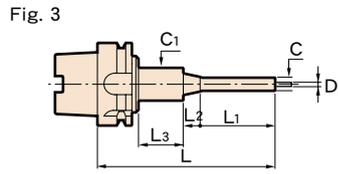
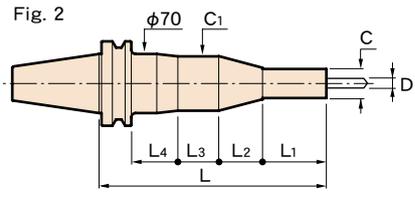


DETa-1 超弹性筒夹刀柄 B 型 (DTB)



20000min⁻¹
※BT50/DN50AD: 10000min⁻¹

型号	Fig.	φD	L	φC	L1	L2	L3	L4	φC1	φD1	kg	G 等级值	N	
BT30-DTB 3- 90	1	0.5 ~ 3.175	90	10	27	13	28	—	25	—	0.6	5.9	1.7	
-DTB 7- 75			75	21	53	—	—	—	—	—	0.5	10.1	2.4	
-105		105	—	83	—	—	—	—	—	—	—	14.2	3.4	
-DTB12- 75		2.5 ~ 13	75	30	53	—	—	—	—	—	—	0.7	16.8	5.6
-105	105		—	83	—	—	—	—	—	—	—	—	—	
BT40-DTB 3- 80	1	0.5 ~ 3.175	80	10	27	13	13	—	25	—	1.3	4.5	2.8	
-110			110	—	—	43	—	—	—	—	—	1.4	4.8	3.2
-110L			—	57	13	—	—	—	—	—	—	1.3	4.5	2.8
-DTB 7- 60		1 ~ 7	60	21	33	—	—	—	—	—	—	1.0	7.7	3.7
-105			105	—	78	—	—	—	—	—	—	1.1	9.1	4.8
-135			135	75	11.8	21.2	—	—	—	30	—	1.3	8.4	5.2
-165			165	75.5	35.3	27.2	—	—	—	40	—	1.6	7.1	5.4
-195			195	—	—	57.2	—	—	—	—	—	1.9	6.2	5.6
-DTB12- 90			2.5 ~ 13	90	30	63	—	—	—	—	—	—	1.2	9.2
-120		120		—	93	—	—	—	—	—	—	1.3	12.2	7.6
-150		150		105	11.8	6.2	—	—	—	40	—	1.5	11.7	8.4
-180		180		—	—	36.2	—	—	—	—	—	1.8	10.1	8.7
-210		210		—	—	66.2	—	—	—	—	—	2.1	8.9	8.9
BT50-DTB 7- 75	1	1 ~ 7	75	21	37	—	—	—	—	—	3.5	3.5	11.7	
-105			105	—	67	—	—	—	—	—	—	3.7	3.5	12.3
-135			135	75	11.8	10.2	—	—	—	30	—	3.8	5.1	18.6
-195			195	—	58.8	23.2	—	—	—	50	—	4.6	5.7	25.0
-255			255	75.5	82.3	59.2	—	—	—	60	—	6.1	4.7	27.6
-315			315	75	58.8	43.7	99.5	50	—	—	—	7.4	4.8	33.9
-DTB12- 75	1	2.5 ~ 13	75	30	37	—	—	—	—	—	3.7	3.5	12.5	
-105			105	—	67	—	—	—	—	—	—	3.9	4.0	14.8
-135			135	97	—	—	—	—	—	—	—	4.0	4.0	15.3
-195			195	105	35.3	16.7	—	—	—	50	—	4.7	5.4	24.3
-255			255	—	58.8	53.2	—	—	—	60	—	5.9	5.0	28.4
-315			315	—	50.2	63	—	—	—	—	—	7.5	4.8	34.1

型号	Fig.	ϕD	L	ϕC	L ₁	L _z	L ₃	L ₄	ϕC_1	ϕD_1	KG	G 等级值	N						
A63 -DTB 3- 75 -105 -105L	3	0.5~ 3.175	75	10	27	13	4	—	25	—	0.8	18.1	6.9						
			105								34	0.9	17.5	7.5					
			57								4	0.8	18.3	7.0					
E25 -DTB 3- 58	3	0.5~ 3.175	58	10	27	16	4.6	—	18	—	0.1	8.4	0.4						
E32 -DTB 3- 65 -DTB 7- 65K	3	0.5~ 3.175	65	10	27	16	4.5	—	20	—	0.2	6.3	0.6						
	4			1 ~ 7	21	30	14.2	10.8	26	9.4	0.9								
E40 -DTB 3- 70 -DTB 7- 95 -DTB12-110	3	0.5~ 3.175	70	10	27	13	—	—	20	—	0.3	6.3	0.9						
	4		1 ~ 7						95		21	50	11.8	13.2	30	0.4	8.4	1.6	
	—		2.5~13						110		30	90	—	—	—	0.5	11.7	2.8	
E50 -DTB 3- 75 -DTB 7-100 -DTB12-115	3	0.5~ 3.175	75	10	27	16	1.5	—	20	—	0.5	7.1	1.7						
	4		1 ~ 7						100		21	50	11.8	12.2	30	0.6	11.2	3.2	
	—		2.5~13						115		30	89	—	—	—	0.8	11.0	4.2	
F63 -DTB 3- 75 -105 -105L	3	0.5~ 3.175	75	10	27	13	4	—	25	—	0.8	5.5	2.1						
			105								34	0.9	5.8	2.5					
			57								4	0.8	5.5	2.1					
F63M -DTB 7-100 -DTB12-120	4	1 ~ 7	100	21	50	11.8	12.2	—	30	—	0.9	7.7	3.3						
			2.5~13						120		30	70	40	1.1	9.1	4.8			
DN40AD-DTB 3- 80 -110 -110L -DTB 7-105 -135 -DTB12-105 -135	1	0.5~ 3.175	80	10	27	13	18.8	25	—	—	1.2	6.1	3.5						
			110				38.8				1.3	5.8	3.6						
			57				18.8				1.2	6.8	3.9						
			1 ~ 7				105				21	74	—	12.1	—	44.45	1.1	9.1	4.8
			135				75				11.8	17	30	1.2	8.7	5.0			
			2.5~13				105				30	74	—	12.1	44.45	1.2	9.9	5.7	
			135				104				1.3	12.9	8.0						
			135				104				1.3	12.9	8.0						
DN50AD-DTB 7-135 -195 -DTB12-135 -195	1	1 ~ 7	135	21	75	11.8	13.2	15.9	30	—	3.3	4.7	14.9						
			195				58.8				26.2	50	4.1	5.5	21.5				
			2.5~13				135				30	100	—	—	—	3.5	3.5	11.7	
			195				105				35.3	19.7	50	4.2	5.2	20.8			
ST12 -DTB 3	5	0.5~ 3.175	29	10	25	61	—	—	—	12	—	—							
ST16 -DTB 3	5	0.5~ 3.175	38.5	10	27	81.5	—	—	—	16	—	—							
ST20 -DTB 3	5	0.5~ 3.175	48	10	27	102	—	—	—	20	—	—							
ST25T -DTB 7- 15 - 45 - 75	6	1 ~ 7	15	21	110	—	—	—	—	25	—	—	—						
			45																
			75																
ST32T -DTB 7- 15 - 45 - 75 -DTB12- 15 - 45 - 75	6	1 ~ 7	15	21	92	—	—	—	—	32	—	—	—						
			45																
			75																
			2.5~13											15	30				
			45																
			75																
S32 -DTB 7- 15 -DTB12- 40	6	1 ~ 7	15	21	70	—	—	—	—	32	—	—	—						
			2.5~13											40	30				

■选购品

- DETa-1 超弹性筒夹→P.31
- 扳手→P.31
- 拉钉(BT)→P.77
- 清洁用具→P.31

■标准附属品

- 冷却液导管(HSK-A)→P.119


■备考

- BT30-DTB12型的拉钉为后拉螺拴一体型专用拉钉。
拧紧时请选用市售的单口扳手(13mm)
- E32-DTB7-65K无法使用过盈量,夹持径仅限筒夹的基准径。
- HSK-E刀柄不附带冷却液导管。也无法安装冷却液导管。

■注意事项

- 使用上的注意和维护保养请参照P.130

BT30-DTB12 用拉钉



型号	ϕD	ϕd	θ	备考
P-538	8	4	45	MAS-1 规格
-535	7.5	2.5	60	MAS-2 规格

切削数据

→ P.29